

**Date: October 13, 2005** **TN 101305**


**Subject: Configuring Bullet Proof FTP Client**  
**Models: DJH View software**  
**Scope: Configuration for FTP client to connect to DJH Server**

To configure the ftp program: install the program and launch the application. The program can be used free of charge for 30 days. After 30 days if you wish to continue using Bullet Proof FTP you will need to register it with the manufacturer.


**Initial Screen Configuration:**

If you have a DJH Designs SSP subscription your ID and password will be noted on the subscription form. If you do not have an ID or Password please contact DJH Designs to obtain one.


Enter the following information: as shown: in the Host field enter: www.djhftp.com  
 In the Login Filed enter: [your id]  
 In the Pass field enter: [your password]

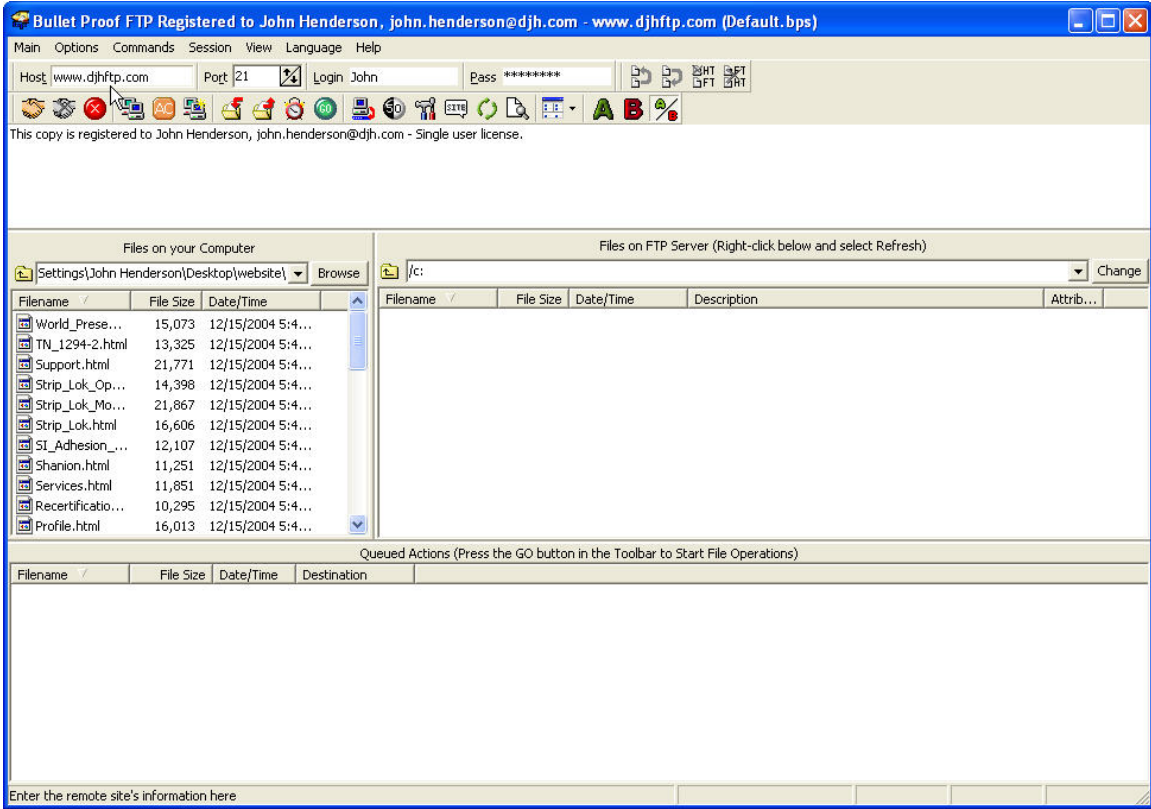

Next you need to turn off passive mode. To do this click on the Options button as shown and then the General button as shown.

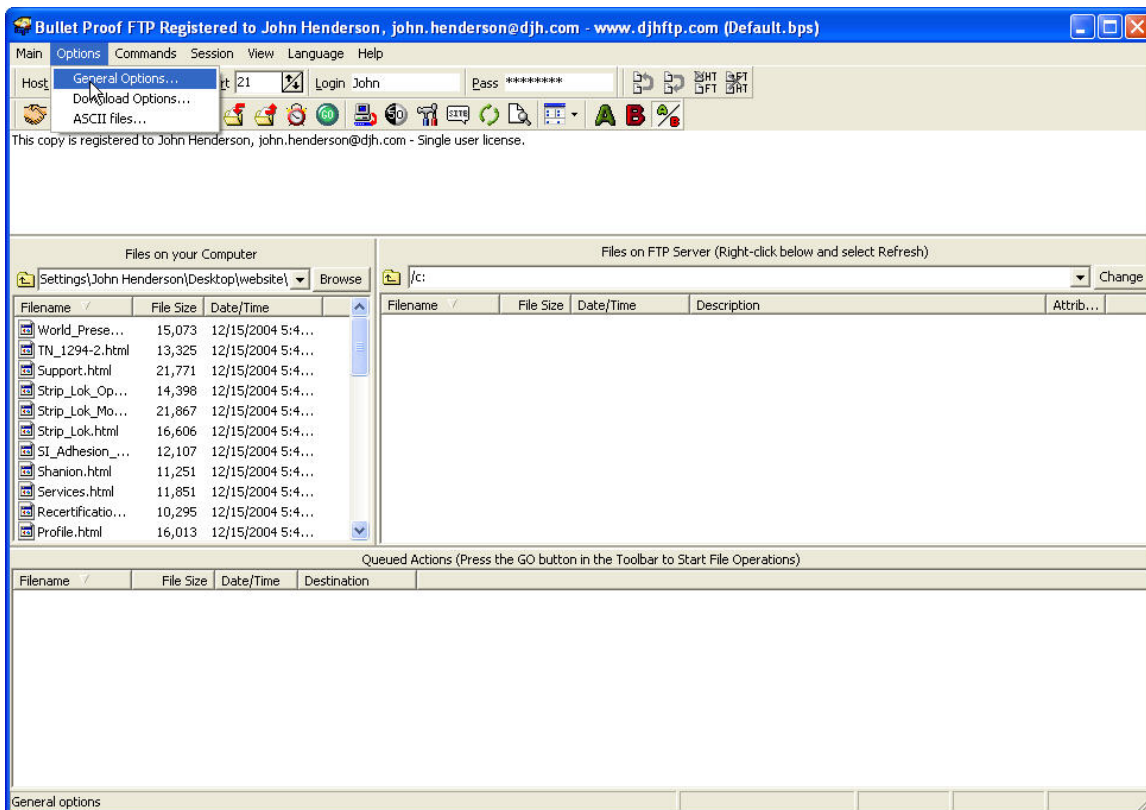


Next Click on the tab labeled Firewall: you should see the following screen.

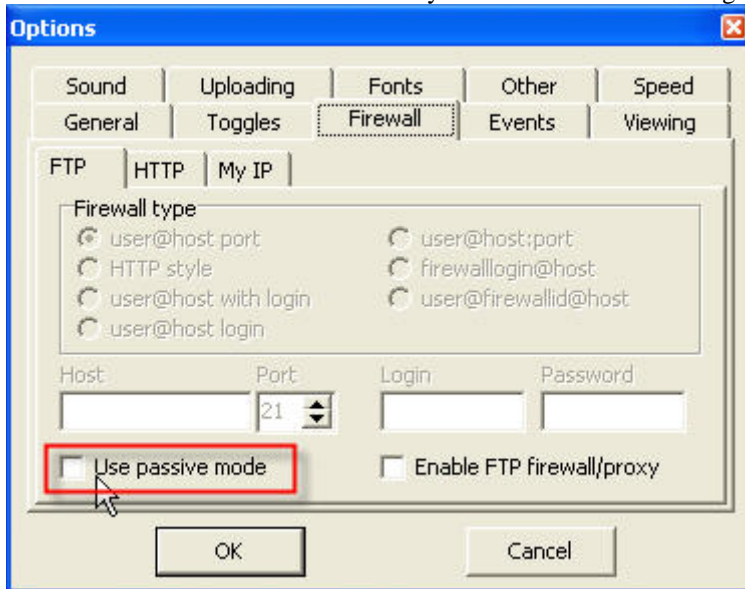

In the area that I have noted with the red box turn off the box that is labeled Use passive mode. It should appear as shown above with no check mark. Click on Ok to continue.

From this screen click on the first Icon (Hand shake) it will connect and you can proceed. In the window on the right you should see the files. Click on the files you require and either drag it to the bottom window or double click on it. Once all the required files are in the bottom window click on the Green GO icon to transfer the file to your PC.

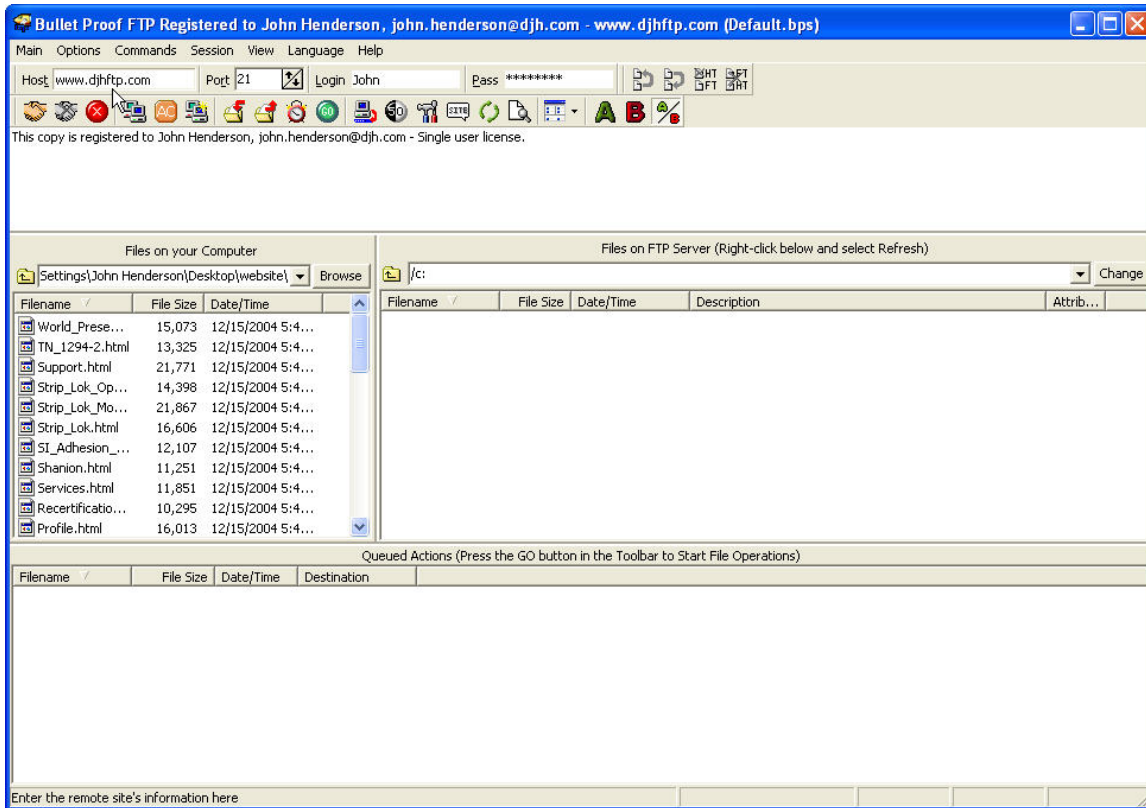

Should you require any additional assistance please contact DJH Designs Technical support [techsupport@djh.com](mailto:techsupport@djh.com)